



**Bobcat®**

**ATTACHMENTS**  
**AUGERS**



***One Tough Animal™***

# AUGERS – SPECIFICATIONS

## Standard features

- Direct drive for more efficient operation.
- A smaller drive housing allows the entire drive unit to follow the bit into the hole, adding 30 cm more dig depth than a standard drive unit.
- An efficient design and modified displacement give these units plenty of torque.
- Mounting system for excavator, loader and telescopic.
- Round and combination shaft augers available.

## Applications

- Construction
- Landscaping
- Rental


	Item number	Compatible with loader	Compatible with excavator	Compatible with telescopic
Auger drive unit 10	6808799	MT55, S70, S100, S130, S150, S160, S175, S185, S205, T110, T140	E14, E16, 325, 328, 425, 428	T2250, T2556, T2566, T3571, T3571L, T35100, T35100L, T35100SL, T35120SL, T35120L, T40140, T40170
Auger drive unit 15C	6809442	S100, S130, S150, S160, S175, S185, S205, S220, S250, S300, S330, S630, S650, S770, S850, A300, A770, T140, T190, T250, T300, T320, T650, T770, T870	325, 328, E32, E35, 425, 428, E45, E50, E55W, E60	T2250, T2556, T2566, T3571, T3571L, T35100, T35100L, T35100SL, T35120SL, T35120L, T40140, T40170
Auger drive unit 15H	7145345	S100, S130, S150, S160, S175, S185, S205, S220, S250, S300, S330, S630, S650, S770, S850, A300, A770, T140, T190, T250, T300, T320, T650, T770, T870	325, 328, E32, E35, 425, 428, E45, E50, E55W, E60	T2250, T2556, T2566, T3571, T3571L, T35100, T35100L, T35100SL, T35120SL, T35120L, T40140, T40170
Auger drive unit 30C	6809445	S130, S150, S160, S160H, S175, S175H, S185, S185H, S205, S205H, S220, S220H, S250, S250H, S300, S300H, S330, S330H, S630, S630H, S650, S650H, S770, S770H, S850, S850H, A300, A300H, A770, A770H, T140, T190, T190H, T250, T250H, T300, T300H, T320, T320H, T650, T650H, T770, T770H, T850, T850H	325, 328, E32, E35, 425, 428, E45, E50, E55W, E60	T2250, T2556, T2566, T3571, T3571L, T35100, T35100L, T35100SL, T35120SL, T35120L, T40140, T40170
Auger drive unit 30H	7138264	S130, S150, S160, S160H, S175, S175H, S185, S185H, S205, S205H, S220, S220H, S250, S250H, S300, S300H, S330, S330H, S630, S630H, S650, S650H, S770, S770H, S850, S850H, A300, A300H, A770, A770H, T140, T190, T190H, T250, T250H, T300, T300H, T320, T320H, T650, T650H, T770, T770H, T850, T850H	325, 328, E32, E35, 425, 428, E45, E50, E55W, E60	

## Weights and dimensions

	Operating weight (kg)	Shipping weight (kg)	Overall width (C) (housing) (mm)	Overall height (B) (housing) (mm)	Overall length (A) (housing) (mm)
Auger drive unit 10	64	69	233	470	214
Auger drive unit 15C	98	106	260	525	269
Auger drive unit 15H	91	99	260	525	269
Auger drive unit 30C	105	114	260	525	269
Auger drive unit 30H	94	113	260	525	269

## Characteristics and performance

	Auger bit type	Digging depth (mm)	Clearance diameter (mm)	Minimum speed and flowrate (RPM–l/min)	Maximum speed and flowrate (RPM–l/min)	Minimum torque and pressure (Nm–kPa)	Maximum torque and pressure (Nm–kPa)
Auger drive unit 10	Round	1473	254	36–23	90–57	1108–11930	2077–20682
Auger drive unit 15C	Round - Hex	1575	305	38–30	85–68	1410–11930	2644–20682
Auger drive unit 15H	Hex	1575	305	38–30	85–68	1410–11930	2644–20682
Auger drive unit 30C	Round - Hex	1575	305	32–49	68–106	2734–11930	5126–20682
Auger drive unit 30H	Hex	1575	305	32–49	68–106	2734–11930	5126–20682

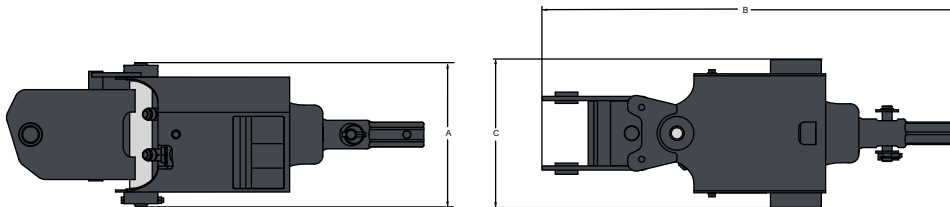

**Bobcat**®

[www.bobcat.eu](http://www.bobcat.eu)