



Bobcat®

T110

Compact Tracked Loaders



Machine Rating

Rated operating capacity, Bobcat	499 kg
Rated operating capacity, ISO 14397-1	505 kg
Tipping load	1443 kg
Pump capacity @ 91% efficiency	47.5 l/min
System relief at quick couplers	20.7 MPa
Travel speed	8.4 km/h

Engine

Make / Model	Kubota / V2403-M-DI-E3
Fuel / Cooling	Diesel / Liquid
Power	31.2 kW
Torque at 1400 RPM (SAE J1 995 Gross)	155.9 Nm
Number of cylinders	4
Displacement	2434 cm ³
Fuel tank capacity	45.2 l

Weights

Operating weight	2379 kg
------------------	---------

Controls

Vehicle steering	Direction and speed controlled by two hand levers
Loader hydraulics tilt and lift	Two foot pedals.
Front auxiliary (standard)	Lateral movement of the right-hand steering lever

Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

Standard Features

- High-back cushion suspension seat
- Automatically activated glow-plugs
- Bob-Tach™ frame
- Bobcat Interlock Control System (BICS)
- Deluxe operator cab
 - Includes interior cab foam, side, top and rear windows
 - Front door w/ windshield wiper
- Engine/hydraulics system shutdown
- Hydraulic bucket positioning
- Instrumentation
- Lift arm support
- Operating lights, front and rear
- Parking brake
- Seat belt
- Seat bar
- Spark arrestor muffler
- CE certification

Options

- Power Bob-Tach™
- Cab enclosure with heating
- Deluxe instrument panel

Attachments


- Angle blade / Snow blade
- Angle broom*†
- Auger
- Backhoe
- Buckets (C/I & L/P)
- Digger
- Dumping hopper
- Grapples and forks
- Hydraulic breaker**
- Mower
- Landplane
- Pallet forks
- Scarifier
- Scraper
- Snow blower*
- Snow V-blade
- Soil conditioner
- Sweeper
- Three-point hitch
- Tiller
- Trencher

*Attachment control kit required.

**When operating the loader with this attachment, a Special Applications Kit, which includes a 12 mm Lexan front door with 6 mm top and rear windows, must be used.

†Optional water kit.

Dimensions

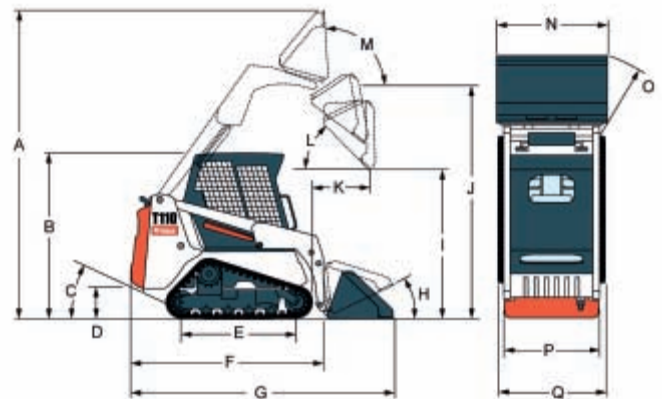

- (A) 3474 mm
- (B) 1882 mm
- (C) 37°
- (D) 201 mm
- (E) 1299 mm
- (F) 2262 mm
- (G) 2972 mm
- (H) 26°
- (I) 1999 mm
- (J) 2634 mm
- (K) 579 mm
- (L) 41°
- (M) 95°
- (N) 1270 mm
- (O) 1852 mm
- (P) 949 mm
- (Q) 1199 mm

Specifications and design are subject to change without notice. Pictures of Bobcat products may show other than standard equipment.

www.bobcat.eu



Bobcat®

