



**Bobcat®**

**ATTACHMENTS**

**VIBRATORY ROLLER**



***One Tough Animal™***

# VIBRATORY ROLLER – SPECIFICATIONS

## Standard features

- Free drum oscillation keeps more of the drum in contact with the surface on uneven terrain.
- Offset drum design allows the right side of the roller to extend past the machine. This is very useful when compacting next to sidewalks, walls, or curbs.
- Durable one-piece drum for extra strength.
- Dual-direction vibration motor permits compaction traveling in either direction.
- Rubber isolation mounts on the roller reduce vibration transfer to loader and operator.
- Both smooth and padded drums are available.

## Applications

- Construction
- Landscaping



	Item number	Compatible with loader
48in / 122cm vibratory roller with padded drum	7165403	S130, S150, S160, S175, S185, S205, T140, T190
48in / 122cm vibratory roller with smooth drum	7165404	S130, S150, S160, S175, S185, S205, T140, T190
73in / 183cm vibratory roller with padded drum	7165401	S205, S220, S250, S300, S330, S630, S650, S770, S850, A300, A770, T250, T300, T320, T650, T770, T870
73in / 183cm vibratory roller with smooth drum	7165402	S205, S220, S250, S300, S330, S630, S650, S770, S850, A300, A770, T250, T300, T320, T650, T770, T870
80in / 203cm vibratory roller with smooth drum	7165400	S250, S300, S330, S630, S650, S770, S850, A300, A770, T250, T300, T320, T650, T770, T870

## Weights and dimensions

	Operating weight (kg)	Shipping weight (kg)	Overall width (C) (mm)	Overall height (B) (mm)	Overall length (A) (mm)
48in / 122cm vibratory roller with padded drum	807	807	1537	643	968
48in / 122cm vibratory roller with smooth drum	811	811	1537	660	968
73in / 183cm vibratory roller with padded drum	993	993	2006	643	963
73in / 183cm vibratory roller with smooth drum	1002	1002	2006	660	963
80in / 203cm vibratory roller with smooth drum	1052	1052	2184	660	963

## Characteristics and performance

	Working width (mm)	Drum diameter (mm)	N° of pads	Oscillation (D) (±°)	Dynamic force (kN) at (l/min)	Frequency (vpm) at (l/min)
48in / 122cm vibratory roller with padded drum	1219	643	72	12	6461 at 75	2879 at 75
48in / 122cm vibratory roller with smooth drum	1219	660	0	12	6461 at 75	2879 at 75
73in / 183cm vibratory roller with padded drum	1854	643	102	7.5	6470 at 90	2882 at 90
73in / 183cm vibratory roller with smooth drum	1854	660	0	7.5	6470 at 90	2882 at 90
80in / 203cm vibratory roller with smooth drum	2032	660	0	7.5	6470 at 90	2882 at 90

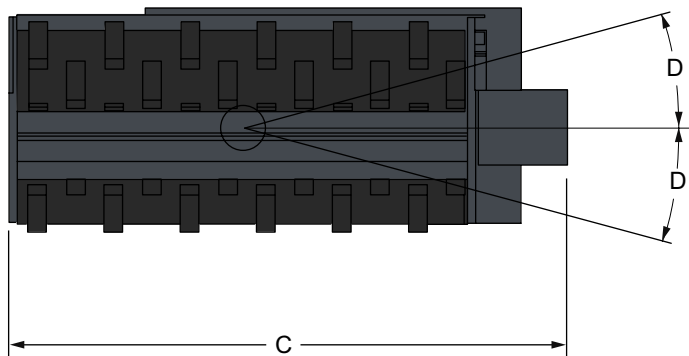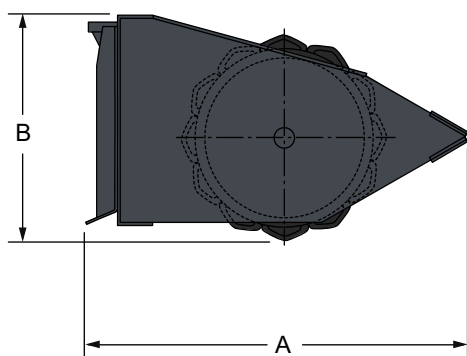

Specifications and design are subject to change without notice. Pictures of Bobcat products may show other than standard equipment.



**Bobcat**®

[www.bobcat.eu](http://www.bobcat.eu)